


MATERIALS

PIPE ENDS: CARBON STEEL
 CORRUGATED HOSE: 321 STAINLESS WITH
 304 STAINLESS BRAIDED SHEATH

NOMINAL SIZE	LENGTH-L	PIPE SIZE	LATERAL OFFSET		WORKING PRES.-PSI (BAR)		APPROX SHIP WEIGHT
			INTERMITTENT	PERMANENT	⑦0 deg F	③00 deg F	
2 x 12	12 (305)	2.0 (51)	0.13 (3)	0.38 (10)	450 (31)	396 (27)	10 (5)
2 1/2 x 14	14 (356)	2.5 (64)	0.13 (3)	0.38 (10)	345 (24)	303 (21)	12 (5)
3 x 14	14 (356)	3.0 (76)	0.13 (3)	0.38 (10)	289 (20)	254 (18)	13 (6)
4 x 16	16 (406)	4.0 (102)	0.13 (3)	0.38 (10)	300 (21)	264 (18)	18 (8)
5 x 17	17 (432)	5.0 (127)	0.13 (3)	0.38 (10)	220 (15)	193 (13)	25 (11)
6 x 18	18 (457)	6.0 (152)	0.13 (3)	0.38 (10)	200 (14)	176 (12)	28 (13)
8 x 20	20 (508)	8.0 (203)	0.13 (3)	0.38 (10)	190 (13)	167 (12)	50 (23)
10 x 24	24 (610)	10.0 (254)	0.13 (3)	0.38 (10)	150 (10)	132 (9)	70 (32)
12 x 25	25 (635)	12.0 (305)	0.13 (3)	0.38 (10)	125 (9)	110 (8)	90 (41)

PSI (BAR) PSI (BAR) LBS (KG)

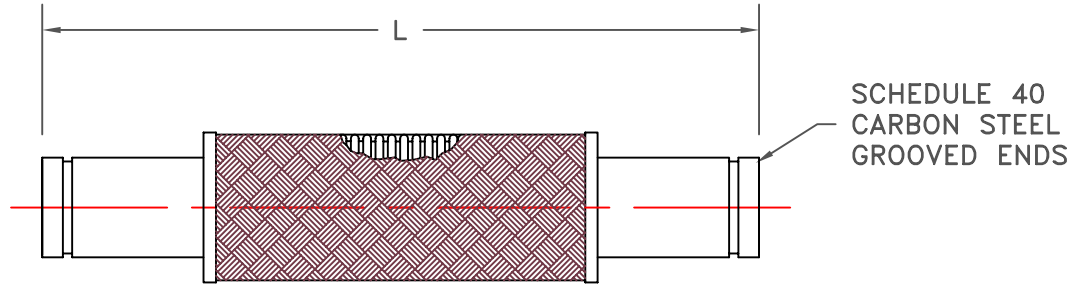

KINFLEX BFMC-GE

ALL DIMS IN INCHES (MM) EXCEPT AS NOTED

TAG	QTY	PIPE SIZE

WARNING: Control Units Must Be Used To Protect This Part From Excessive Movement If Piping Is Not Properly Anchored. Precautions Should Be Taken To Protect Personnel In The Event Of Leakage Or Splash.

Proposal/Inquiry/Order Number: _____

Customer Name: _____

Project Name: _____

Architect/Engineer: _____


Contractor: _____

DATE: _____

REMARKS:

Drawn By: BSB Date: 02/06/03 Approved By: _____

Checked By: _____ Scale: None



Drawing No.: S-05.05-01K