


**MATERIALS**

PIPE ENDS: CARBON STEEL

CORRUGATED HOSE: 321 BRONZE WITH BRAIDED BRONZE SHEATH

NOM SIZE	NOMINAL LENGTH-L	PIPE THREAD	LATERAL OFFSET		WORKING PRES.-PSI (BAR)		APPROX SHIP WEIGHT
			INTERMITTENT	PERMANENT	⑦0 deg F	③00 deg F	
1/2 x 10	10 (254)	0.50 (13)	0.25 (6)	0.50 (13)	450 (31)	373 (26)	1.0 (0.5)
3/4 x 10	10 (254)	0.75 (19)	0.25 (6)	0.50 (13)	370 (26)	307 (21)	1.0 (0.5)
1 x 10	10 (254)	1.00 (25)	0.25 (6)	0.50 (13)	250 (17)	207 (14)	1.0 (0.5)
1 1/4 x 10	10 (254)	1.25 (32)	0.25 (6)	0.50 (13)	200 (14)	166 (11)	2.0 (0.9)
1 1/2 x 12	12 (305)	1.50 (38)	0.25 (6)	0.50 (13)	200 (14)	166 (11)	3.5 (1.6)
2 x 14	14 (356)	2.00 (51)	0.25 (6)	0.50 (13)	170 (12)	141 (10)	5.0 (2.3)

PSI (BAR)      PSI (BAR)      LBS (KG)

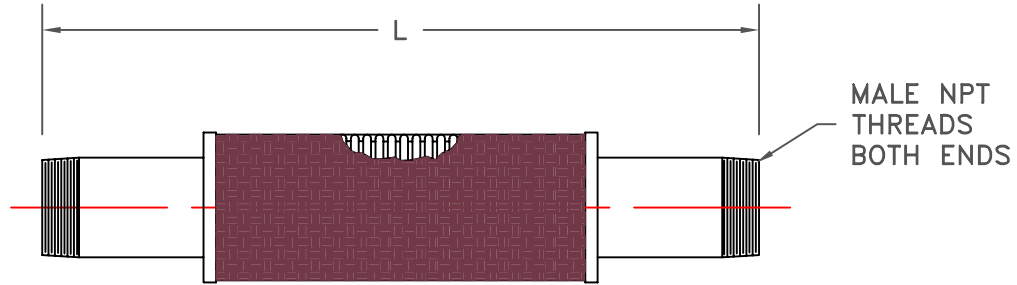

KINFLEX BFMC-MTE

ALL DIMS IN INCHES (MM) EXCEPT AS NOTED

TAG	QTY	PIPE SIZE

**WARNING: Control Units Must Be Used To Protect This Part From Excessive Movement If Piping Is Not Properly Anchored. Precautions Should Be Taken To Protect Personnel In The Event Of Leakage Or Splash.**

Proposal/Inquiry/Order Number:

Customer Name:

Project Name:

Architect/Engineer:

Contractor:

DATE:

REMARKS:

Drawn By: BSB      Date: 02/06/03      Approved By:

Checked By:      Scale: None



Drawing No.:

S-05.05-01H