


KINETICS KINFLEX FLEXIBLE CONNECTORS

PERFORMANCE DATA

OPERATING TEMPERATURES	STANDARD DUTY (225 psi) FC & FTC 1 1/2" - 12"	HEAVY DUTY (300 psi) FC & FTC 1 1/2" - 12"	UTC 3/4" - 2"
170° F	225 psi	300 psi	150 psi
180° F	210 psi	280 psi	150 psi
190° F	195 psi	260 psi	150 psi
200° F	180 psi	240 psi	150 psi
210° F	165 psi	220 psi	150 psi
220° F	150 psi	200 psi	- psi
*250° F	150 psi	200 psi	- psi
MAX. VACUUM (in. Hg)	26	26	26
MIN. BURST PRES. (psi @ 100° F)	800	1050	710

*ONLY WITH BUTYL LINER OR EPDM LINER.

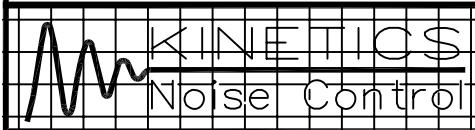

TITLE
**KINFLEX
 PERFORMANCE DATA**

LAST DATE
 REVISED
5/1/96

DRAWN BY
DW

DRAWING NO.
S-05.05-01A